

DRBL2450

2x4 Back-Lid Wide Voltage Panel Light with 3CCT Selectable

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Name		
Notes		

Body

- Durable airtight aluminum
- White polycarbonate diffuser lens for low glare

LED Characteristics

- 50-Watt LED Module
- Minimal heat emission
- 5300 Lumen output
- Superior LED Performance and lifespan
- Ideal illumination for commercial

Dimming

- 10%-100% dimming capability
- Flicker-free with 0-10v dimmer

Mounting


- Recessed direct to T-bar ceiling
- Hanging with aircraft cable

Description

- -The DRBL-Series is a wide voltage and high-performance LED flat panel that uses a back-lit design to provide a longer lasting lighting solution that replaces traditional fluorescent lighting.

Operating Temperature

- -20 C - 40 C (-4°F - 104°F)

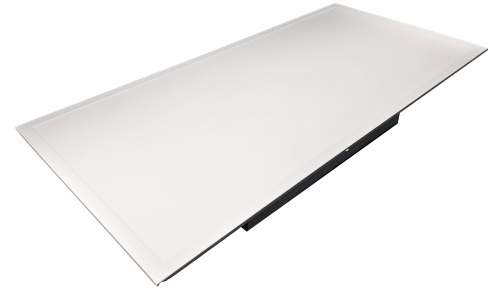

SPECIFICATION

Lumen Output	5300 Lumen	Voltage	100-347 VAC
Beam Angle	110	Application	T-bar ceiling, hanging
CCT	3500K/4000K/5000K	Dimming	YES
Lifetime	>50,000 Hours	Dimming Tech	0-10V
CRI	82	DLC	YES
Power	50W	Warranty	5 Years
Efficacy	110 lm/W	IC Rated	YES

